




### Manitou AWP Range

Discover a wide range of lifting, electrical and diesel platforms, direct response to your business concerns, indoors or outdoors, whether rental activities or end user' needs.



- Dealer's network
- Maintenance contracts
- Financing
- Warranty extension
- Connected solution
- Used
- Original spare parts

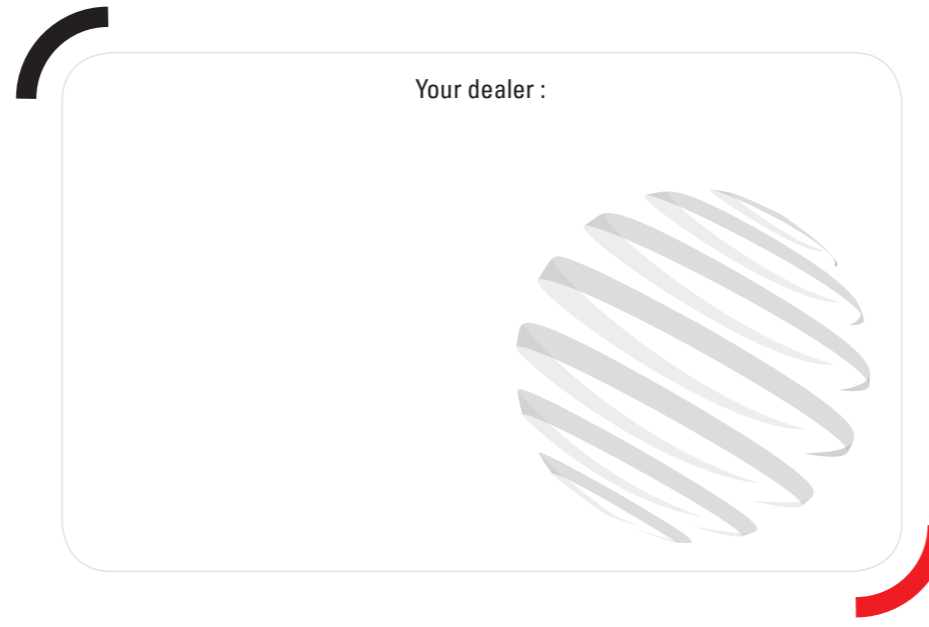

**Head office**  
 B.P. 249 - 430 rue de l'Aubinière - 44158 Ancenis Cedex - France  
 Tél : 00 33 (0)2 40 09 10 11 - Fax : 00 33 (0)2 40 09 10 97  
 www.manitou.com



The publication provides a description of the configuration variants and options for Manitou products, which may differ by equipment. The equipment presented in this brochure may be part of a series, as an option, or it may not be available depending on the version. Manitou reserves the right, at any time and without notice, to amend the specifications described and represented. The specifications provided do not bind the manufacturer. For more details, please contact your Manitou agent. This is not a contractually binding document. The presentation of the products is not contractually binding. List of specifications non-exhaustive. The logo as well as the visual identity of the company are owned by Manitou and cannot be used without authorisation. All rights reserved. The photos and diagrams contained in this brochure are only provided for consultation and information purposes. MANITOU BP SA - Limited company with head of directors - Share capital: 30 547 624 euros - 857 802 500 RCS Nantes

7081016N\_A\_2018\_AWP\_Range



# AWP

## DIESEL & ELECTRIC PLATFORMS




## Handling your world

Founded over 60 years ago by the Braud family, Manitou Group now operates worldwide. A world-leader in all-terrain material handling, the Group designs, produces, distributes and services equipment intended for construction, agriculture and industries.

The Group's product ranges include: telescopic loaders including rotary and heavyweight all-terrain telescopic forklift-trucks, semi industrial and industrial all-terrain masted forklifts, compact loaders (skid-steers) on wheels or tracks, aerial work-platforms for personnel, truck-mounted forklifts, warehousing equipment and attachments.

Thanks to its high-profile brands, Manitou, Gehl and Mustang, and its network of 1,400 dealers throughout the world, the group provides the best solutions, creating most value for its customers.

With its head office in France, the group had a revenue of €1.287 billion in 2015 in 140 countries and employs 3,214 staff who are resolutely focused on customer satisfaction.

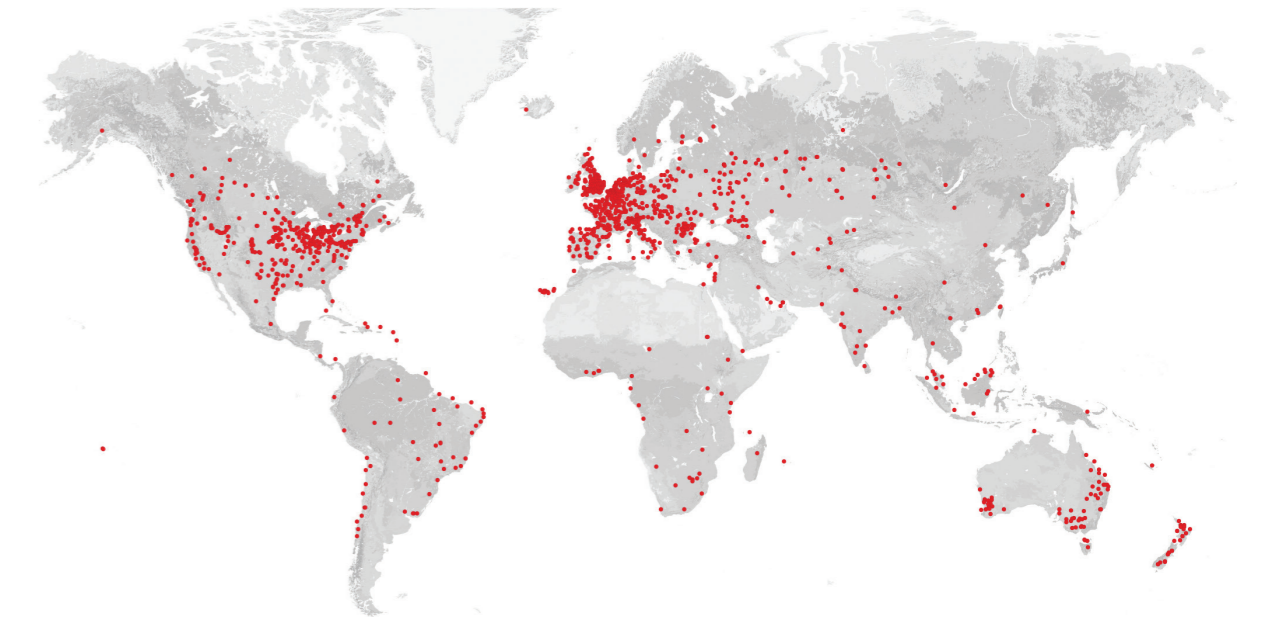

## Diesel Articulated



Working height (m)
Platform height (m)
Platform capacity (kg)
Outreach (m)
Overhang (m)
Dimension overall (L x w x h)
Dimension for transport (L x w x h)
Platform dimension (L x l)
Engine power (kW)
Tyres
Platform weight (kg)

	<b>160 ATJ</b>
Working height (m)	16.01
Platform height (m)	14.01
Platform capacity (kg)	230
Outreach (m)	8.3
Overhang (m)	7.38
Dimension overall (L x w x h)	6.53 x 2.3 x 2.37
Dimension for transport (L x w x h)	4.44 x 2.3 x 2.61
Platform dimension (L x l)	1.8 x 0.8
Engine power (kW)	Kubota - 26.2
Tyres	Cured-on solid 16.5"
Platform weight (kg)	6160

	<b>160 ATJ+</b>
Working height (m)	16.25
Platform height (m)	14.25
Platform capacity (kg)	400
Outreach (m)	8.95
Overhang (m)	7
Dimension overall (L x w x h)	6.93 x 2.3 x 2.37
Dimension for transport (L x w x h)	4.96 x 2.3 x 2.7
Platform dimension (L x l)	2.3 x 0.9
Engine power (kW)	Kubota - 33.1
Tyres	Foam filled 18"
Platform weight (kg)	8100

	<b>180 ATJ</b>
Working height (m)	18.15
Platform height (m)	16.15
Platform capacity (kg)	230
Outreach (m)	10.62
Overhang (m)	7.42
Dimension overall (L x w x h)	7.64 x 2.28 x 2.46
Dimension for transport (L x w x h)	5.59 x 2.8 x 2.7
Platform dimension (L x l)	1.8 x 0.8
Engine power (kW)	Kubota - 26.2
Tyres	Foam filled 18"
Platform weight (kg)	7550

	<b>200 ATJ</b>
Working height (m)	20
Platform height (m)	18
Platform capacity (kg)	230
Outreach (m)	12
Overhang (m)	8
Dimension overall (L x w x h)	8.5 x 2.4 x 2.71
Dimension for transport (L x w x h)	6.30 x 2.4 x 3.15
Platform dimension (L x l)	2.1 x 0.8
Engine power (kW)	Kubota - 33.1
Tyres	Foam filled 20"
Platform weight (kg)	10050

## Diesel Man'Go



Working height (m)
Platform height (m)
Platform capacity (kg)
Outreach (m)
Overhang (m)
Dimension overall (L x w x h)
Dimension for transport (L x w x h)
Platform dimension (L x l)
Engine power (kW)
Tyres
Platform weight (kg)

	<b>MAN'GO12</b>
Working height (m)	11.91
Platform height (m)	9.91
Platform capacity (kg)	230
Outreach (m)	6.69
Overhang (m)	4.8
Dimension overall (L x w x h)	5.5 x 1.8 x 2.01
Dimension for transport (L x w x h)	4.5 x 1.8 x 2.49
Platform dimension (L x l)	1.5 x 0.99
Engine power (kW)	Kubota - 19.4
Tyres	Cured-on solid
Platform weight (kg)	4100

## Diesel Telescopic



Working height (m)
Platform height (m)
Platform capacity (kg)
Outreach (m)
Overhang (m)
Dimension overall (L x w x h)
Dimension for transport (L x w x h)
Platform dimension (L x l)
Engine power (kW)
Tyres
Platform weight (kg)

	<b>260 TJ</b>
Working height (m)	25.91
Platform height (m)	23.91
Platform capacity (kg)	400
Outreach (m)	19.7
Overhang (m)	0.43
Dimension overall (L x w x h)	10.84 x 2.43 x 2.75
Dimension for transport (L x w x h)	8 x 2.43 x 2.75
Platform dimension (L x l)	2.3 x 0.9
Engine power (kW)	Kubota - 33.6
Tyres	Foam filled 20"
Platform weight (kg)	16300

	<b>280 TJ</b>
Working height (m)	27.75
Platform height (m)	25.75
Platform capacity (kg)	350/240
Outreach (m)	21.45
Overhang (m)	0.43
Dimension overall (L x w x h)	11.35 x 2.43 x 2.75
Dimension for transport (L x w x h)	8.04 x 2.43 x 2.75
Platform dimension (L x l)	2.3 x 0.9
Engine power (kW)	Kubota - 33.6
Tyres	Foam filled 20"
Platform weight (kg)	16500

## Diesel Scissor



Working height (m)
Platform height (m)
Platform capacity (kg)
Dimension overall (L x w x h)
Dimension with rails lowered (L x w x h)
Platform extension (m)
Ground clearance (m)
Travel speed (kph)
Engine power (kW)
Tyres
Platform weight (kg)

	<b>100 SC</b>
Working height (m)	9.9
Platform height (m)	7.9
Platform capacity (kg)	680
Dimension overall (L x w x h)	3.76 x 1.75 x 2.59
Dimension with rails lowered (L x w x h)	3.12 x 1.75 x 1.92
Platform extension (m)	1.52
Ground clearance (m)	0.24
Travel speed (kph)	5.6
Engine power (kW)	Kubota - 18.5
Tyres	Foam filled
Platform weight (kg)	3768

	<b>120 SC</b>
Working height (m)	11.96
Platform height (m)	9.96
Platform capacity (kg)	454
Dimension overall (L x w x h)	3.76 x 1.75 x 2.59
Dimension with rails lowered (L x w x h)	3.12 x 1.75 x 1.92
Platform extension (m)	1.52
Ground clearance (m)	0.24
Travel speed (kph)	5.6
Engine power (kW)	Kubota - 18.5
Tyres	Foam filled
Platform weight (kg)	3949

	<b>140 SC</b>
Working height (m)	14.2
Platform height (m)	12.2
Platform capacity (kg)	363
Dimension overall (L x w x h)	3.76 x 1.75 x 2.59
Dimension with rails lowered (L x w x h)	3.12 x 1.75 x 2.08
Platform extension (m)	1.52
Ground clearance (m)	0.24
Travel speed (kph)	5.6
Engine power (kW)	Kubota - 18.5
Tyres	Foam filled
Platform weight (kg)	5136

## Electric Articulated



Working height (m)
Platform height (m)
Platform capacity (kg)
Outreach (m)
Overhang (m)
Dimension overall (L x w x h)
Dimension for transport (L x w x h)
Platform dimension (L x l)
Engine power (Ah/V)
Tyres
Platform weight (kg)

	<b>120 AETJ-C</b>
Working height (m)	11.95
Platform height (m)	9.95
Platform capacity (kg)	200
Outreach (m)	7
Overhang (m)	4.77
Dimension overall (L x w x h)	5.48 x 1.2 x 1.99
Dimension for transport (L x w x h)	3.74 x 1.2 x 2.16
Platform dimension (L x l)	1.2 x 0.92
Engine power (Ah/V)	240/48
Tyres	Solid non marking
Platform weight (kg)	6660

	<b>150 AETJ-C</b>
Working height (m)	15
Platform height (m)	13
Platform capacity (kg)	200
Outreach (m)	7.6
Overhang (m)	7
Dimension overall (L x w x h)	6.05 x 1.5 x 1.97
Dimension for transport (L x w x h)	4.4 x 1.5 x 2.08
Platform dimension (L x l)	1.2 x 0.922
Engine power (Ah/V)	240/48
Tyres	Solid non marking
Platform weight (kg)	6700

	<b>170 AETJ-L</b>
Working height (m)	16.9
Platform height (m)	14.9
Platform capacity (kg)	200
Outreach (m)	9.43
Overhang (m)	7.15
Dimension overall (L x w x h)	6.84 x 1.75 x 1.97
Dimension for transport (L x w x h)	5.12 x 1.75 x 2.04
Platform dimension (L x l)	1.2 x 0.92
Engine power (Ah/V)	240/48
Tyres	Solid non marking
Platform weight (kg)	6910

	<b>150 AETJ-L Bi-energy</b>
Working height (m)	15.4
Platform height (m)	13.4
Platform capacity (kg)	230
Outreach (m)	7.81
Overhang (m)	7.27
Dimension overall (L x w x h)	6.11 x 1.9 x 2.1
Dimension for transport (L x w x h)	4.55 x 1.9 x 2.13
Platform dimension (L x l)	1.2 x 0.92
Engine power (Ah/V)	300/48
Tyres	Foam filled non marking
Platform weight (kg)	6435

	<b>170 AETJ-L Bi-energy</b>
Working height (m)	17
Platform height (m)	15
Platform capacity (kg)	230
Outreach (m)	9.43
Overhang (m)	7.27
Dimension overall (L x w x h)	6.97 x 1.9 x 2.1
Dimension for transport (L x w x h)	5.25 x 1.9 x 2.13
Platform dimension (L x l)	1.2 x 0.92
Engine power (Ah/V)	300/48
Tyres	Foam filled non marking
Platform weight (kg)	7435

## Electric Vertical mast



Working height (m)
Platform height (m)
Platform capacity (kg)
Outreach (m)
Overhang (m)
Dimension overall (L x w x h)
Dimension for transport (L x w x h)
Platform dimension (L x l)
Engine power (Ah/V)
Tyres
Platform weight (kg)

	<b>80 VJR</b>
Working height (m)	7.65
Platform height (m)	5.65
Platform capacity (kg)	200
Outreach (m)	3.24
Overhang (m)	4.235
Dimension overall (L x w x h)	2.95 x 0.99 x 1.99
Dimension for transport (L x w x h)	2.95 x 0.99 x 1.99
Platform dimension (L x l)	1.11 x 0.93
Engine power (Ah/V)	250/24
Tyres	Solid non marking
Platform weight (kg)	2250

	<b>100 VJR</b>
Working height (m)	9.85
Platform height (m)	7.85
Platform capacity (kg)	200
Outreach (m)	3.15
Overhang (m)	6.67
Dimension overall (L x w x h)	2.8 x 0.99 x 1.99
Dimension for transport (L x w x h)	2.8 x 0.99 x 1.99
Platform dimension (L x l)	1.11 x 0.93
Engine power (Ah/V)	250/24
Tyres	Solid non marking
Platform weight (kg)	2650

	<b>90 V'Air</b>
Working height (m)	9
Platform height (m)	7
Platform capacity (kg)	230
Outreach (m)	2.04
Overhang (m)	-
Dimension overall (L x w x h)	2.31 x 1.1 x 2.31
Dimension for transport (L x w x h)	2.31 x 1.1 x 2.31
Platform dimension (L x l)	0.95 x 0.68
Engine power (Ah/V)	250/24
Tyres	Solid non marking
Platform weight (kg)	2710

## Electric Scissor



Working height (m)
Platform height (m)
Platform capacity (kg)
Dimension overall (L x w x h)
Dimension with rails lowered (L x w x h)
Platform extension (m)
Ground clearance (m)
Travel speed (kph)
Engine power (Ah/V)
Tyres
Platform weight (kg)

	<b>78 SEC</b>
Working height (m)	7.79
Platform height (m)	5.79
Platform capacity (kg)	227
Dimension overall (L x w x h)	1.83 x 0.81 x 2.1
Dimension with rails lowered (L x w x h)	1.83 x 0.81 x 1.75
Platform extension (m)	0.91
Ground clearance (m)	0.1
Travel speed (kph)	4
Engine power (Ah/V)	225/4x6
Tyres	Solid non marking
Platform weight (kg)	1503

	<b>100 SEC</b>
Working height (m)	9.92
Platform height (m)	7.92
Platform capacity (kg)	227
Dimension overall (L x w x h)	2.26 x 0.81 x 2.26
Dimension with rails lowered (L x w x h)	2.26 x 0.81 x 1.91
Platform extension (m)	0.91
Ground clearance (m)	0.1
Travel speed (kph)	3.5
Engine power (Ah/V)	225/4x6
Tyres	Solid non marking
Platform weight (kg)	1959

	<b>120 SE</b>
Working height (m)	11.75
Platform height (m)	9.75
Platform capacity (kg)	318
Dimension overall (L x w x h)	2.44 x 1.17 x 2.39
Dimension with rails lowered (L x w x h)	2.44 x 1.17 x 1.8
Platform extension (m)	0.91
Ground clearance (m)	0.1
Travel speed (kph)	3.5
Engine power (Ah/V)	225/4x6
Tyres	Solid non marking
Platform weight (kg)	2812

