




The fixed and rotating telehandler ranges for construction

Discover a wide range of Manitou telehandlers. Each model is designed to respond directly to your day-to-day concerns, whether you are a rental company, dealer or an end user.



Our services offer

- Dealer network
- Maintenance contracts
- Financing
- Warranty extension
- Connected solution
- Used
- Genuine spare parts

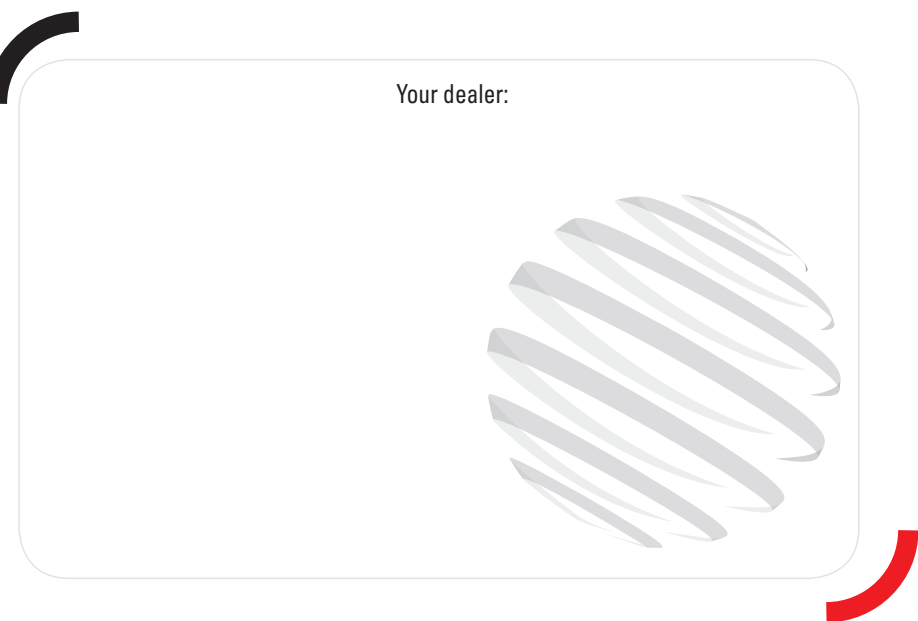

Head office
B.P. 249 - 430 rue de l'Aubinière - 44158 Ancenis Cedex - France
Tél : 00 33 (0)2 40 09 10 11 - Fax : 00 33 (0)2 40 09 10 97
www.manitou.com



700618EN_B_0517_PRES_TECH_CONST_R1



TECHNICAL PRESENTATION

CONSTRUCTION

FIXED AND ROTATING TELEHANDLERS




Handling your world

Founded over 60 years ago by the Braud family, the Manitou Group now operates worldwide. A world-leader in all-terrain material handling, the Group designs, manufactures, distributes and services equipment for construction, agriculture and industries.

The Group's product ranges include: all-terrain telescopic fixed, rotating and heavy-load telehandlers; all-terrain, semi-industrial and industrial masted forklift trucks, articulated loaders, compact skid-steer loaders on wheels or tracks, access platforms, truck-mounted forklifts, warehousing equipment and attachments.

Through its iconic brands, Manitou, Gehl and Mustang, and its worldwide network of 1,400 dealers, the Group offers the best solutions to create optimum value for its customers.

With headquarters in France, the Group registered a revenue in 2016 of 1,335 billion euros in 140 countries and employs 3,300 people who are all strongly focused on satisfying customers.

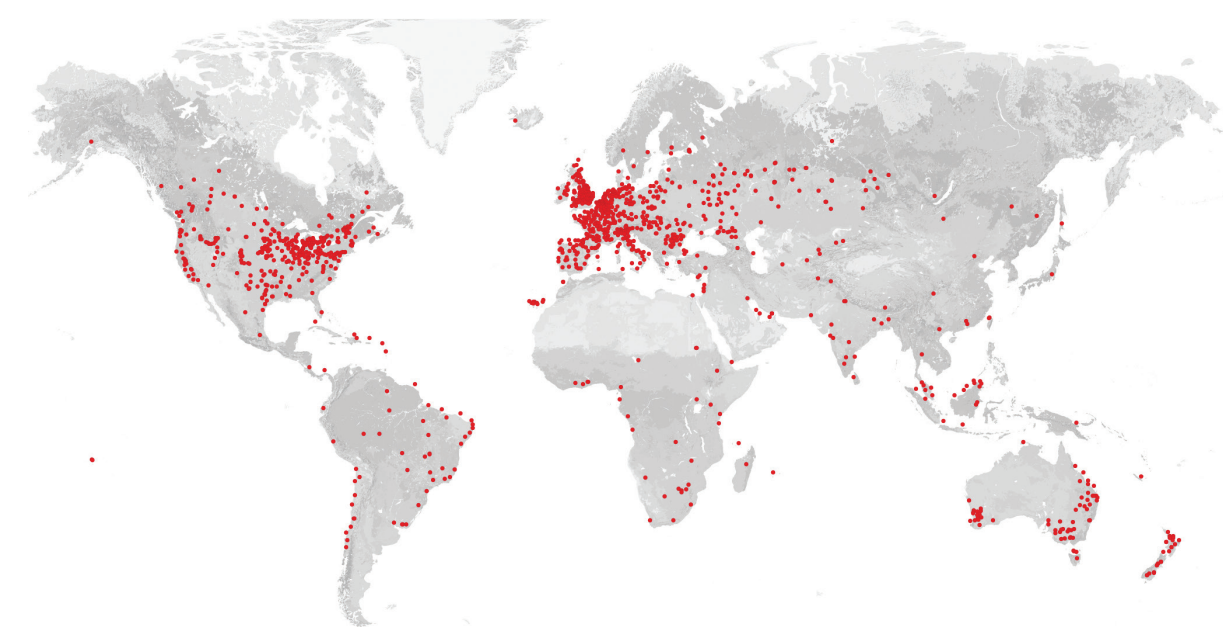

3 brands
distributed
by 1 400 dealers
in 140 countries



Fixed Telehandlers

Max.capacity	kg
Max. lifting height	m
Max. outreach	m
Engine	brand
Transmission	
Power	HP (kW)
Max. travel speed	kph
Unladen weight (with forks)	kg
Overall length	m
Overall width	m
Overall height	m
Turning radius (over tyres)	m



MT 420 H	MT 625	MT 625 easy	MT 732 easy	MT 835 easy	MT 932 easy	MT 1030 easy	MT 1135	MT1135 easy	MT 1335	MT1335 easy	MT 1435 easy	MT 1440	MT 1440 easy	MT 1840	MT 1840 easy
2000	2500		3200	3500	3200	3000	3500		3500		3500	4000		4000	
4.30	5.85		6.90	7.75	9.00	9.98	11.05		12.55		13.52)	13.53		17.55	
2.65	3.40		3.94	4.45	6.58	7.15	7.75		8.75		9.52	9.46		13.08	
Kubota	Kubota		Deutz	Deutz	Deutz	Deutz	Perkins	Deutz	Perkins	Deutz	Deutz	Perkins	Deutz	Perkins	Deutz
Hydrostatic	Hydrostatic		Torque converter	Torque converter	Torque converter	Torque converter	Torque converter	Torque converter	Torque converter	Torque converter	Torque converter	Torque converter	Torque converter	Torque converter	Torque converter
49 (36) Stage 3A	75 (55.4) Stage 3B / final Tier 4	49 (36) Stage 3A	75 (55.4) Stage 3B / final Tier4	75 (55.4) Stage 3B / final Tier4	75 (55.4) Stage 3B / final Tier4	75 (55.4) Stage 3B / final Tier4	75 (55.4) Stage 3B / final Tier4	75 (55.4) Stage 3B final Tier4	100 (75) Stage 3B final tier 4	75 (55.4) Stage 3B final Tier4	75 (55.4) Stage 3B / final Tier4	100 (75) Stage 4 / final tier 4	75 (55.4) Stage 3B / final Tier4	100 (75) Stage 4 / final tier 4	75 (55.4) Stage 3B / final Tier4
25	25		25	25	25	25	25	25	25 or 35	25	25	25 or 35	25	25 or 35	25
4260	4800	4485	6780	7200	7145	7720	8900	8800	9200 (20282)	9100 (15752)	9700	11000	10900	11800	11700
3.63	3.90		4.74	5.24	4.70	4.99	5.37		5.86		6.13	6.13		6.27	
1.49	1.81		2.34	2.28	2.34	2.34	2.28		2.28		2.37	2.37		2.42	
1.90	1.92		2.30	2.30	2.30	2.30	2.42		2.42		2.45	2.45		2.50	
2.98	3.31		3.80	3.65	3.80 (	3.75	3.65		3.65		3.97	3.97		4.01	

Common to all ranges

- 4 wheel drive and 4 wheel steer
- an oscillating rear axle
- a full range of easily interchangeable attachments
- a robust, reliable design

Manitou telehandlers comply with current environmental and safety standards.

Check out our attachments at:

manitou.com

Rotating Telehandlers

		MRT 1440 EASY	MRT 1640 EASY	MRT 1840 EASY	MRT 2145 EASY	MRT 2150 P+	MRT 2550 P+	MRT 3050 P+	MRT 2470 P+	MRT 3255 P+
Max.capacity	kg	4000 (8819)	4000	4000	450	4999	4999	4999	7000	5500
Max. lifting height	m	13.8 (37'8")	15.80	17.90	20.60	20.90	24.60	29.70	23.70	31.50
Max. outreach	m	11.50 (45'3")	13.50	15.10	17.90	17.90	21.40	25.80	21.50	27.20
Engine	brand	Perkins	Perkins	Perkins	Perkins	Mercedes	Mercedes	Mercedes	Mercedes	Mercedes
Transmission		Hydrostatique	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic
Power	HP (kW)	102 / 75	102 (75)	102 (75)	102 (75)	156 (115)	156 (115)	176 (129)	176 (129)	231 (170)
Max. travel speed	kph	32 (19.88)	32 (19.88)	32 (19.88)	32 (19.88)	40 (24.85)	40 (24.85)	40 (24.85)	40 (24.85)	32 (19.88)
Unladen weight (with forks)	kg	12490 (27536)	13000	13200	14530	17930	18900	21850	21850	23986
Overall length	m	5.35 (17'6")	6.36	5.54	6.59	6.87	7.84	7.82	7.55	8.50
Overall width	m	2.40 (7'11")	2.40	2.40	2.50	2.49	2.49	2.49	2.49	2.50
Overall height	m	2.97 (9'8")	2.97	2.97	3.02	3.05	3.05	3.05	3.05	3.20
Turning radius (over tyres)	m	3.60 (11'81")	3.60	3.60	3.60	4.88	4.88	6.50	6.50	4.91



Heavy Telehandlers

		MHT 790	MHT 1490	MHT 10130	MHT 10180	MHT 10230	MHT 14350
Max.capacity	kg	9000 @ 600 mm	9000 @ 600 mm	13000 @ 600 mm	18000 @ 600 mm	23000 @ 900 mm LC	35000 @ 1200 mm LC
Max. lifting height	m	6.84	13.65	9.62	9.63	9.63	13.60
Max. outreach	m	3.72	9.50	5.17	5.56	5.80	8.50
Engine	brand	John Deere	Mercedes	Mercedes	Mercedes	Mercedes	Mercedes
Transmission		Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic	Hydrostatic
Power	HP (kW)	141 (104)	176 (129)	176 (129)	176 (129)	176 (129)	350
Max. travel speed	kph	30	31	31	25	25	25
Unladen weight (with forks)	kg	13020	20800	18490	24000	29300	69000
Overall length	m	5.27	6.65	6.14	6.65	6.99	10.93
Overall width	m	2.47	2.51	2.51	2.52	2.85	3.53
Overall height	m	2.48	3.00	2.99	3.00	3.05	3.82
Turning radius (over tyres)	m	4.88	5.34	5.34	5.50	5.40	7.33

- Turret rotation
- Continuous turret rotation
- Wheel drive / wheel steer
- Stabilizers
- frame levelling
- A model: access prepared
- Gradability