



# CUBE HYPER

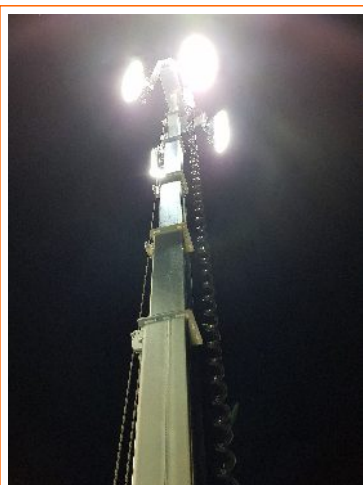

# CUBE+ HYPER

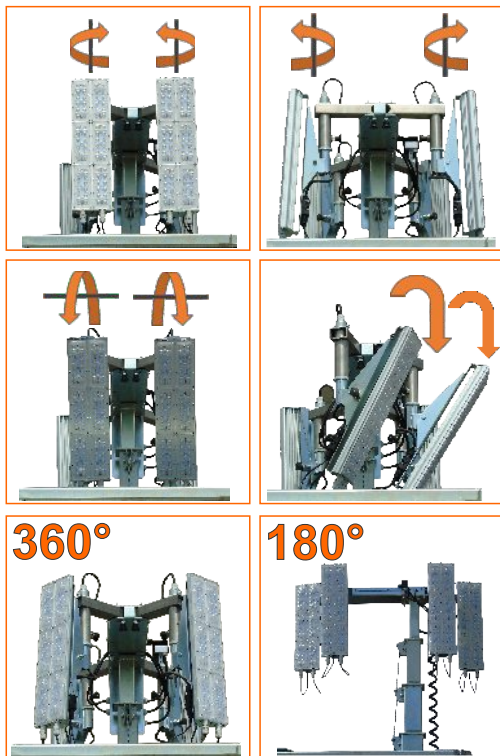


**OMNIA® LED TECHNOLOGY**  
The special Hyper version is equipped with **Omnia® LED Technology**. Floodlights are installed on a fully adjustable bracket allowing the operator to point the floodlights in any direction and provide total 360 illumination. Floodlights are also available with anti-glare system.



**DIGITAL CONTROLLER**  
A digital controller specifically designed exclusively for our Generac lighting towers. Every function of the machine can be controlled and managed from a single digital panel.

#### TOP ACCESSIBILITY

Three doors for wide access and two compass-top doors with gull wing design provide complete access to the engine for safe and convenient maintenance. Single back door provides access to the control panel.



The **V20 HYPER** lamps can be equipped with anti-glare shells. The anti-glare floodlights are a perfect solution for roadworks and other applications where there is a risk of glaring workers and passers-by.

## TECHNICAL DATA

## CUBE+ HYPER K2

|                            |                |                            |
|----------------------------|----------------|----------------------------|
| Lifting system             | -              | Hydraulic                  |
| Min. dim.                  | cm             | 1220 x 1150 x 2420         |
| Max. dim.                  | cm             | 1790 x 1740 x 8400         |
| Dry weight                 | kg             | 1070                       |
| Lamps power                | W              | 4 x 320                    |
| Lamps type                 | -              | LED                        |
| Certified illuminated area | m <sup>2</sup> | 4,200                      |
| Total lumen                | Lm             | 184,000                    |
| Mast rotation              | °              | 340                        |
| Wind speed resistance      | km/h           | 80                         |
| Tank capacity              | liter          | 170                        |
| Engine model               | -              | Kubota Z482                |
| Engine cooling             | W=Water/A=Air  | 2 cyl. @1500/1800 rpm<br>W |
| Alternator                 | kVA/V/Hz       | 5/220/50 - 5/240/60        |
| Outlet socket              | kVA/V/Hz       | 2,5/220/50 - 2,5/240/60    |
| Inlet plug                 | A/V/Hz         | 16/220/50 - 16/240/60      |
| Running time               | h              | 283                        |
| Avg. sound pressure level  | dB(A) @ 7m     | 58                         |

**GENERAC®** | **MOBILE PRODUCTS**

**Generac Mobile Products Srl**

Part of Generac Power Systems, Inc.

Via Stazione, 3bis - 27030 Villanova d'Ardenghi (PV) - Italy

Tel +39 0382 567011 - gmp.srl@generac.com

www.towerlight.com | www.generacmobileproducts.com