

150AETJ-C

TECHNICAL DATA SHEET



150 AETJ-C



150 AETJ-C	
 Working height	15 m
Platform height	13 m
Articulation height	7 m
Outreach	7.60 m
 Jib tilting	+70° / -70°
Jib Movement (option 3D)	+70° / -70°
Basket rotation	140°
Turret rotation	355°
 Capacity	200 kg
Number of persons (indoor/outdoor)	2/2
Basket (width and length)	1.20 x 0.96 m
 1. Overall width	1.50 m
2. Overall length	6.05 m
3. Overall height	1.97 m
4. Overall length when folded	4.40 m
5. Overall height when folded	2.08 m
6. Interior turning circle	1.87 m
7. Exterior turning circle	3.96 m
8. Exterior turning circle	4.82 m
9. Ground clearance	14 cm
10. Wheelbase	2.00 m
 Speed of forward movement	5 kph
Working speed	0.60 kph
 Maximum slope accessible	25 %
Maximum tilt	5 % / 3°
 Tyres	0.60 x 0.19 m
Driving wheels	2 (back)
Steering/directional wheels	2 (front)
 Weight	6700 kg
(varies according to options & standards of the country)	
 Batteries	240 Ah / 2 x 24 V
Integrated charger	45 Ah / 48 V

Standard equipment

Proportional switches/levers
 Forward movement possible at maximum height
 Sound and visual alarm in case of excessive slant and overload
 Integrated charger
 Emergency manual descent
 Negative braking system
 Sound warning system inside the platform
 Hour meter
 Indication of state of charge of batteries
 Hooks for sling loading/lifting
 Integrated diagnostic aid
 Predisposition 220V
 Tyres with non-marking edges
 Basket with transparent floor
 Bus CAN technology
 Tool box inside platform

Optional equipment

Flashing lights
 Working light
 Predisposition of air
 Predisposition of water
 230V power input with differential circuit-breaker
 Special paint
 Biodegradable oil
 Rotation of pendulum arm (3D)
 High capacity battery (360 Ah)
 Central topping up of batteries
 Warning signal moving forward
 Warning signal for all movements
 Protective cover for instruments panel
 Initial certificate of verification prior to entry into service
 Safety harness

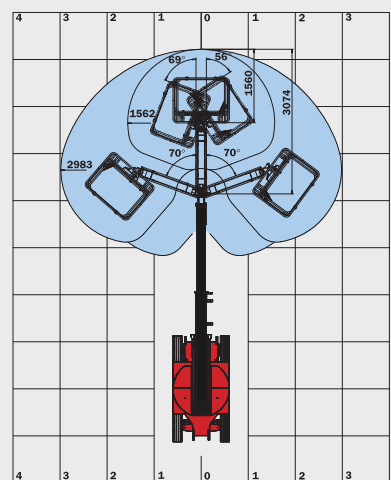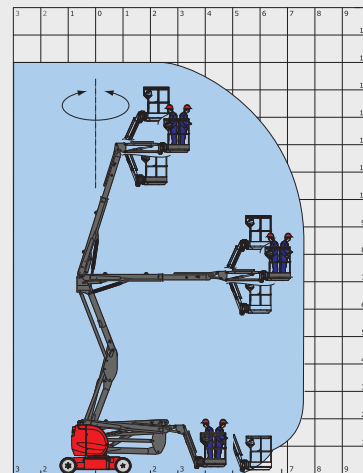

Option 3D: Jib Movement

