

VMAX

VMAX is the first CROSSOVER in the industry, made by Generac® Tower Light. This machine offers to our customers the performance of traditional light towers joined with new great and unique features. Available with 4x1000 metal halide floodlights and two different engine options.



		VMAX K	VMAX Y
TECHNICAL DATA			
Minimum dimensions (mm)	Lenght x Width x Height	2430 x 1130 x 2450	2430 x 1130 x 2450
Maximum dimensions (mm)	Lenght x Width x Height	2430 x 2190 x 8000	2430 x 2190 x 8000
Dry weight (kg)		760	760
Lifting system	M:Manual / H:Hydraulic	M	M
Mast rotation (°)		340	340
Lamps power (W)		4 x 1000	4 x 1000
Lamps type	MH:MetalHalide / LD:LED	MH	MH
Total lumen (Lm)		360000	360000
Illuminated area (m²)		4200	4200
Engine		Kubota D1105	Yanmar 3TN
Engine cooling	W:water / A:air	W	W
Cylinders (q.ty)		3	3
Engine speed (RPM)	50 / 60 Hz	1500 / 1800	1500 / 1800
Liquid containment (110%)	√:Yes / •:No	√	√
Alternator	kVA/V/Hz	8/220/50 - 8/240/60	8/220/50 - 8/240/60
Outlet Socket	kVA/V/Hz	3/220/50 - 3/240/60	3/220/50 - 3/240/60
Avg. sound pressure	dB(A)@7mt	63	63
Wind speed resistance (km/h)		80	80
Tank capacity (liters)		110	110
Total running time (h)		65	69

HANDLING FROM 4 SIDES

The machine offers the possibility of handling with forklift from 4 sides for maximum flexibility.

REINFORCED FRAME

A more resistant canopy with reinforced frame with a protection to the frontal side of the machine makes the VMAX the perfect lighting tower for heavy applications.

MAXIMUM STABILITY

Four fully integrated outriggers will ensure maximum stability in every application and environment.

METAL HALIDE LAMPS


4x1000W powerful metal halide lamps able to illuminate medium and big working areas.

MOBILE & STATIONARY

Thanks to the new system of stabilizers, the VMAX offers its customers the ability to transform mobile machine in static few minutes and easy steps.

LIQUID CONTAINMENT TANK

A liquid containment tank to avoid any risk of leakages on the ground.

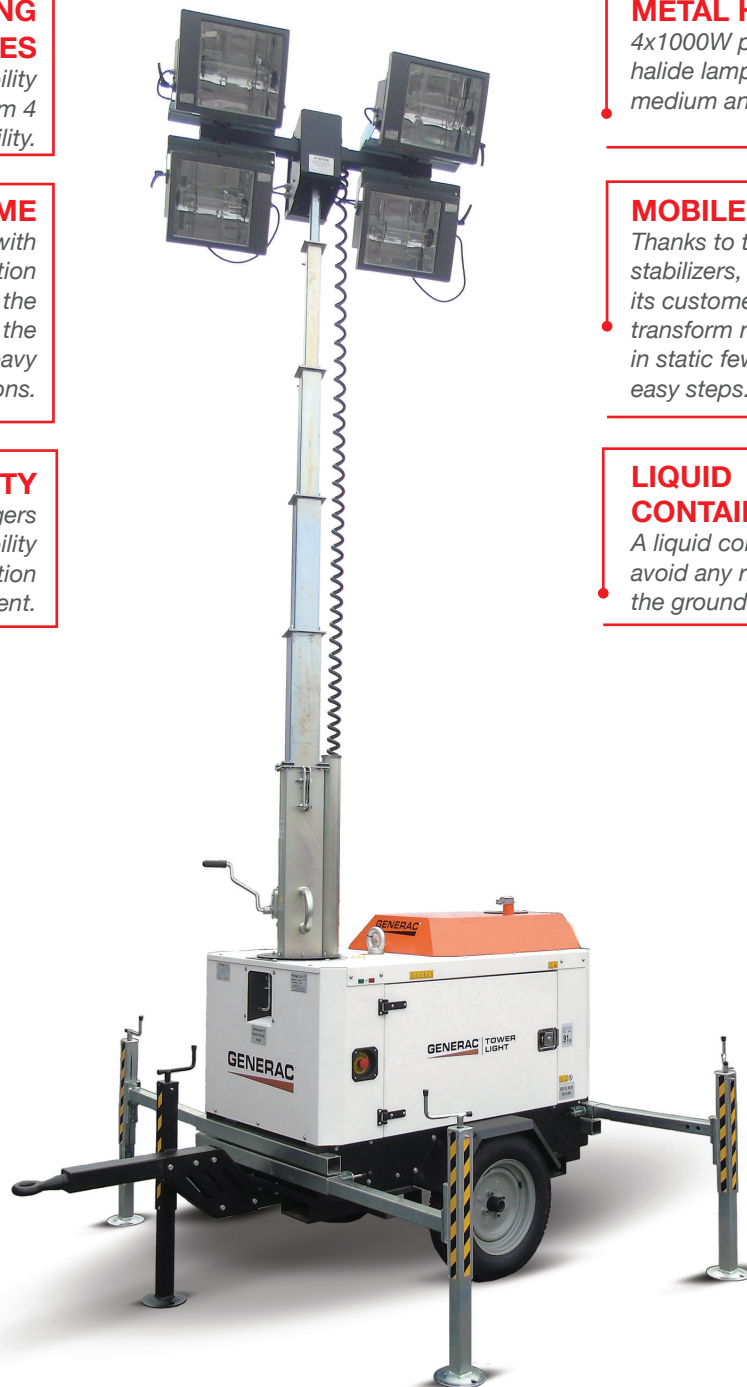

OPTIONS AVAILABLE

- Low speed site-tow trailer (standard)
- Road trailer type A (straight)
- Road axle only
- 110V outlet socket
- Pre-heating system
- Earth picket with 5m cable
- Main/generator selector switch
- Plastic box for documents
- Dedicated colour
- Chalwyn valve
- Certified spark arrestor
- Auto-start with timer and darkness sensor
- Hot-dip zinc coating of mast sections
- Ball hitch type 50 mm
- Eyelet hitch type 50 mm
- Eco panel with digital timer and darkness sensor